

RanidPort Solutions

Spectrometric Radiation Portal Monitoring Solution



- Portal detection solutions designed for fixed and mobile use
- Indoor and outdoor applications
- Allows for very high sensitivity requirements, to detect and identify all types of radionuclides



Environics

WE SENSE & DETECT FOR A SAFER WORLD

RanidPort Solutions

Spectrometric Radiation Portal Monitoring Solution



RanidPort solutions are advanced spectrometric portal monitors designed for different types of fixed and mobile applications which complement the Environics RanidVision product family.

RanidPort's high volume NaI(Tl) scintillation detector has rapid detection and identification capability in presence of radioactivity or radioactive material.


Different solutions have been designed to be ideal for pedestrian, vehicle or cargo portal monitors. Relocatable portal monitor solution is also available. Installation can be done on open or covert basis depending on the site.

KEY FEATURES

- Large volume NaI(Tl) gamma detector
- Neutron detection with high energy gamma radiation
- Neutron booster in fixed applications
- Indoor and outdoor solutions
- Fixed and mobile applications
- Flexible configuration: single or double sided and multiple detector portals for vehicle screening applications
- Automated operation with optional camera surveillance system
- Web server based Graphical User interface
- MySQL based spectrometric database

APPLICATIONS

- Airport and Railway Safety
- Customs and Border Control
- Passenger and Luggage Monitoring Systems
- Locating Orphan Sources
- Locating Suspicious Parcels
- Radiological Safety of Public Events
- Radiological Safety of Industrial Sites

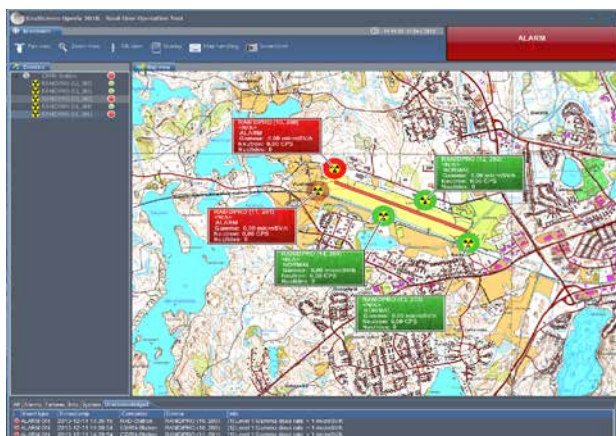

RavidPort-N

- Designed for fixed indoor applications
- Integrated neutron booster that increases the detection sensitivity of neutrons
- Flexible configuration of the neutron booster: single or double sided detection direction
- Optional background radiation shield
- Web server based Graphical User interface
- MySQL based spectrometric database

RavidPort-N Industrial

- Designed for rough outdoor applications
- Extended temperature range with heating and cooling accessories
- Integrated neutron booster that increases the detection sensitivity of neutrons
- Flexible configuration of the neutron booster: single or double sided detection direction
- Possibility to create multidetector portals for e.g. cargo screening applications
- Uniform database and user interface features with RavidPort-N

RavidPort Mobile

- Designed for mobile use: car, boat, helicopter or airplane
- Easily deployable spectroscopy portal monitor
- Rugged detection and transport case
- Wireless connection capabilities using WLAN or 4G
- Integrated GPS and mapping function
- Compatible with vehicle power systems (9-36VDC)
- Uniform database and user interface features with RavidPort-N

EnviScreen Operix CBRN Monitoring System Software

- Operational system software with GPS mapping capabilities
- Complete reachback capabilities: Compatibility with Linssi-gamma-ray spectrometry database
- Possibility to include Chemical and Biological detection capabilities into same system
- Optional Integrated Mirasys video surveillance system synchronized with radiation measurement data for source tracking

Technical Data

Performance Specification

Gamma and Neutrons	4"x4"x16" NaI(Tl) detector	Nuclide identification and categorization	<ul style="list-style-type: none"> Designed to fulfill and exceed standard N42.34 ANSI Isotope list Medical, Industrial, SNM and NORM nuclide categorization Customizable user defined nuclides and ROIs
Resolution	<8% at 662 keV		
Humidity	0-95% non-condensing		
Energy range	30 keV – 8MeV		
MCA	2048 channels Maximum Count Rate >250k cps	Functions	<ul style="list-style-type: none"> Dose rate calculation Nuclide identification Spectrum analysis Comprehensive radionuclide database

Technical Specification

Enclosure	RanidPort-N	RanidPort Mobile	RanidPort-N Industrial
Dimensions	Approx. 1458 x 394 x 374 mm (57"L x 15"W x 14"H)	Approx. 998 x 247 x 247mm (39.3" x 9.7" x 9.7")	Approx. 1355 x 650 x 450 mm (53"L 25"W x 17"H)
Weight	Approx. 100 kg (3527 oz.)	Approx. 40 kg (1511 oz.)	Approx. 130 kg (4586 oz.)
Power	100-250 VAC 50-60 Hz	100-250 VAC 50-60 Hz 9-36 VDC (Vehicle power)	100-250 VAC 50-60 Hz
Battery	12V, 5Ah, Back-up battery	12V, 20Ah, Removable battery unit Optional 33Ah battery unit	12V, 5Ah, Back-up battery
Temperature (Operating)	0 °C to 50 °C (32 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)
Temperature (Storage)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)
Communication (Standard)	Ethernet, Wi-Fi (802.11 b/g/n)	Ethernet, 4G, Wi-Fi (802.11 b/g/n)	Ethernet, Wi-Fi (802.11 b/g/n)
GPS	Optional	Build-in sensor	Optional
Neutron Moderator	Built-in	N/A	Built-in
Dust & Water Resistance	Indoor use	IP65	IP55



P.O. Box 349 • FI-50101 • Mikkeli • FINLAND
tel +358 201 430 430 • **fax** +358 201 430 440
 sales@environics.fi • www.environics.fi

Subscribe to our **Newsletter**
www.environics.fi/newsletter

View our **Solution Portfolio**
www.environics.fi/portfolio

Find us in **Social Media**

